

PURCHASE ORDER	
<b>To</b> <b>Sky Roads Contracting</b> <b>Roads and building</b> <b>C.R :4030530108</b> <b>Vat no : 311881464100003</b> <b>Mob no : +966 5312 04317</b> <b>Attn.: Mr. Saif</b>	<b>Project: East Guard House &amp; Search Facility Buildings – ASIC, Jizan</b>  <b>P.O. #: TL INT-PO-014</b> <b>P.O. Date: 01-12-2024</b>  <b>VAT Reg No: 311687445600003</b>
<b>Quotation no :</b>  <b>Your Quotation dated 05-11 -2024</b>	

Sl.#	Description	Unit	Quantity	Unit Price	Total Price (SAR)
	<b>Roof Waterproofing Works</b> Supply and Installation of Roof Water Proofing System with complete materials, tools, equipment, accessories, qualified labors and supervisor etc. as per the approved materials, sample and as detailed in the reference quotation				
1	Cleaning roof area from, dirt and any unwanted things Removing from the roof to make the roof ready for working	M2	207	5	1,035
2	Making guidelines for foam to apply foam properly on roof area 8cm height from the walls side and 4cm height to the drain side to give it some slope with 8cm by 8cm center applying Foam foam concrete on the roof area according to the guidelines and the wait for 24 hours so that the foam concrete get completely dry	M2	207	22	4,554
3	Apply Shemper cement 10cm width	lm	207	5	1,035
4	Applying Primer on the foam concrete	M2	207	8	1,656
5	Applying first layer for simple waterproofing membrane fully bonded with torch with 10cm side lap and 15cm	M2	207	30	6,210



رقم المكتب: ٢٠٤، الدور الثالث، برج بناية الأصيل، شارع التوبة، جدة الرمز البريدي

المملكة العربية السعودية

304, 3<sup>rd</sup> Floor, Binaya Al Aseel Tower, Al Towbah Street, Jeddah: 23216, Kingdom of Saudi Arabia.  
CR: 4030511468 | Tele: +966 50 763 5539 | Email: [info@technolineintl.com](mailto:info@technolineintl.com) | [www.technolineintl.com](http://www.technolineintl.com)



**TECHNO LINE**

INTERNATIONAL CONTRACTING COMPANY

**شركة تيكنو لاين**


الدولية للمقاولات

6	Base and Aluminum: Apply mineral waterproofing membranes 30cm up to vertical area supply and mechanical fixation of aluminum counter flashing with size 6cmx0.8mm all along the parapet and required sealant at top	L	53	20	1,060
7	Applying insulation board 5 cm	M2	207	30	6,210
8	Applying geo textile	M	207	10	2,070
9	Applying gravel	M2	207	18	3,726
				TOTAL	27,556/-
				Vat 15%	4,133/-
				<b>Total with vat (SAR)</b>	<b>31,689/-</b>

**Terms and Conditions:**

- Above quantity and price is for two projects (Search Facility and Guard House) which are adjacent to each other.
- Work Execution shall be carried out in accordance with approved material submittal, Sample, Drawings, client Standards and Requirements
- The Scope of Work are to be completed as per the site requirement and as per the instructions of TLC site engineer.
- All Materials supplied shall be complied against the approved material data sheets / submittals.
- Top flashing including supply and apply of silicone sealant is part of supplier's scope.
- Supply of chemical required for the foam concrete is part of Supplier's scope.
- All tools, equipment and accessories required to execute the complete works, including mixing of foam concrete, spreading and leveling of the foam concrete is part of Supplier's scope.
- Supplier to ensure proper slope is provided in coordination with the roof drains / rainwater pipes provided.
- Leak test to be done by Supplier up to the acceptance of the client.
- If the test is not successful and if any works to be re-done in order to get approval of the tests, it shall be done by Supplier without any additional cost to TLC.
- Supplier to send the ID copies of their workers upon receiving this PO, in order to arrange gate pass.
- Works shall be started at site immediately upon receipt of the advance payment.
- Works shall be considered as completed only after acceptance of the works by the client ASIC, for the two buildings.

Supplier to sign this PO and send back to TLC upon receipt of the PO.

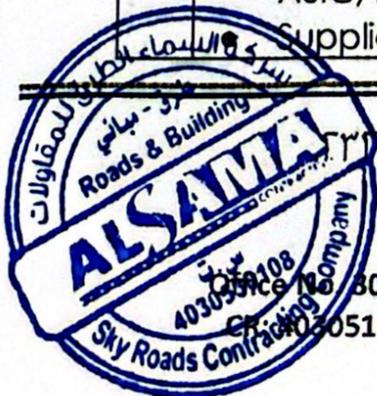

رقم المكتب: ٣٠٤، الدور الثالث، برج بناية الأصيل، شارع التوبة، جدة الرمز البريدي: ٢٣٢١٦

المملكة العربية السعودية

804, 3<sup>rd</sup> Floor, Binaya Al Aseel Tower, Al Towbah Street, Jeddah: 23216, Kingdom of Saudi Arabia.

4030399 | Fax: +966 50 763 5539 | Email: [info@technolineintl.com](mailto:info@technolineintl.com) | [www.technolineintl.com](http://www.technolineintl.com)

**Warranty:** 10 Years Warranty for all material and workmanship from the completion of the works

**Payment terms:**

- 20% Advance
- 50% upon completion of foam concrete and Primer
- 30% upon completion of all works and successful water test



**Work Schedule:** Works at site to be started within one day of receipt of advance payment

Issued By:



Authorized Signatory  
Technoline International Contracting & Services Co,

Acknowledgment / Received :

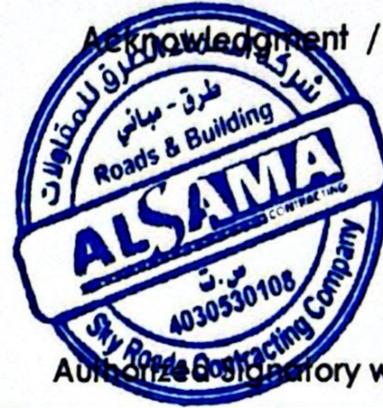

Authorized Signatory with Stamp

رقم المكتب: ٣٠٤، الدور الثالث، برج بناية الأصيل، شارع التوبة، جدة الرمز البريدي: ٢٣٢١٦.

المملكة العربية السعودية

Office No. 304, 3<sup>rd</sup> Floor, Binaya Al Aseel Tower, Al Towbah Street, Jeddah: 23216, Kingdom of Saudi Arabia.  
CR: 4030511468 | Tele: +966 50 763 5539 | Email: [info@technolineintl.com](mailto:info@technolineintl.com) | [www.technolineintl.com](http://www.technolineintl.com)